

(19) World Intellectual Property  
Organization  
International Bureau



(43) International Publication Date  
7 October 2004 (07.10.2004)

PCT

(10) International Publication Number  
**WO 2004/085711 A1**

(51) International Patent Classification<sup>7</sup>: C25B 15/00,  
C02F 1/461, C25B 9/20

(21) International Application Number:  
PCT/NL2003/000234

(22) International Filing Date: 27 March 2003 (27.03.2003)

(25) Filing Language: English

(26) Publication Language: English

(71) Applicant and

(72) Inventor: ZILVOLD, Hendrik, Martin [NL/NL]; Vale  
Ouwelaan 202, NL-8084 JV T Harde (NL).

(72) Inventor: ZILVOLD, Gerrit, Albert; Oude Bovendwar-  
sweg 31, NL-8084 JD T Harde (NL).

(74) Agents: DOHMEN, Johannes, Maria, Gerardus et  
al.; Algemeen Octrooi- en Merkenbureau, P.O. Box 645,  
NL-5600 AP Eindhoven (NL).

(81) Designated States (*national*): AE, AG, AL, AM, AT, AU,  
AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU,  
CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH,  
GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC,  
LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW,  
MX, MZ, NI, NO, NZ, OM, PH, PL, PT, RO, RU, SC, SD,  
SE, SG, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US,  
UZ, VC, VN, YU, ZA, ZM, ZW.


(84) Designated States (*regional*): ARIPO patent (GH, GM,  
KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW),  
Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),  
European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE,  
ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO,  
SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM,  
GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report

For two-letter codes and other abbreviations, refer to the "Guid-  
ance Notes on Codes and Abbreviations" appearing at the begin-  
ning of each regular issue of the PCT Gazette.

(54) Title: APPARATUS FOR CARRYING OUT AN ELECTROLYTIC PROCESS ON A HALOGENIDE COMPOUND

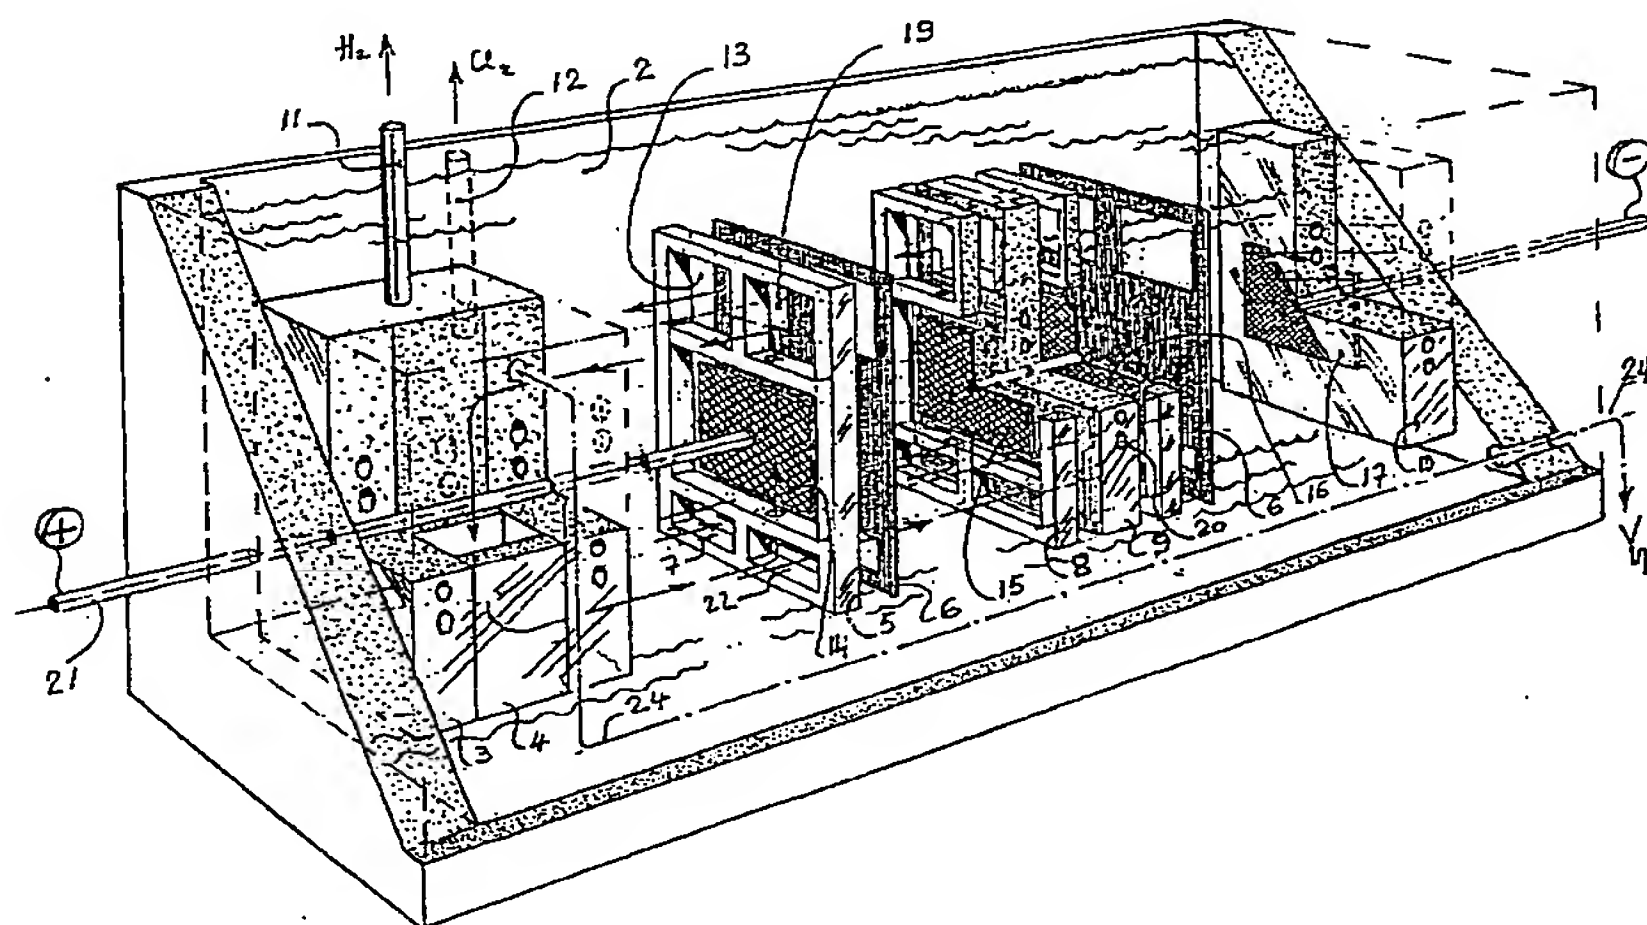

(57) Abstract: The present invention relates to an apparatus for carrying out an electrolytic process on a halogenide compound, in which apparatus several electrolytic cells are electrically connected in series, which electrolysis cells each comprise a cell element, provided with underlying supply pipes for supplying electrolyte and with collecting discharge pipes disposed near the upper side thereof for discharging electrolyte and the gases formed during the electrolytic process, a cathode compartment including a cathode and an anode compartment including an anode, and a diaphragm or semi-permeable membrane, in which the electrolytic cells have been pressed together between two end plates with a certain bias, so that each anode compartment and each cathode compartment is constructed as one unit together with the supply pipes and the collecting discharge pipes.

WO 2004/085711 A1

Apparatus for carrying out an electrolytic process on a halogenide compound.

5 The present invention relates to an apparatus for carrying out an electrolytic process on a halogenide compound, in which apparatus several electrolytic cells are electrically connected in series, which electrolytic cells each comprise a cell element, provided with underlying supply pipes for supplying electrolyte and with collecting discharge pipes disposed near the upper side thereof for discharging electrolyte and the gases formed during the electrolytic process, a cathode compartment including a cathode and an anode compartment including an anode, and a diaphragm or semi-permeable membrane, in which the electrolytic cells have been pressed together between two end plates with a certain bias, so that each anode compartment and each cathode compartment is constructed as one unit together with the supply pipes and the collecting discharge pipes.

From US patent No 5,064,514 there is known an arrangement for the preparation of chloric acid from hypochlorous acid, which arrangement comprises only one mono-cell construction. The arrangement that is known from said document does not comprise a bipolar electrode or intermediate plate, therefore. The cooling system used with said arrangement consists of two cooling plates arranged adjacently to the anode and cathode backplates, which plates have a hollowed out or grooved area which is open on the side adjacent to the anode and the cathode, but which is closed and solid at the surface of the cooling plate on the side adjacent to the backplates. This grooved area will permit the circulation of a coolant to control the heat generated during the electrolytic process. As a result of the construction used therein, the coolant is in direct electrical contact with the electrodes

30 From US patent No 5,082,543 there is known an electrolytic cell of the filter press type for the production of peroxy and

perhalogenate compounds. The cell that is known from said document is of the semi-filter press type, because each cell is separately electrically connected. Consequently, a bipolar electrode or intermediate plate is not used. The electrodes that are used, which are completely made of a metal, are double-walled, between which parallel walls a coolant is pumped. In practice, full submersion in coolant of this cell is not possible within reason because of the great number of electrical connections. As a result of the construction of the double-walled electrodes, the coolant that is passed therethrough is under an electrode voltage.

10               From German Offenlegungsschrift No 199 10 639 there is known a reactor for generating ozone; said document does not provide any information as regards the electrolytic cell that is used, however.

              The apparatus referred to in the introduction is known per se from NL 8303210, in which chlorine gas intended for chlorinating water, such as swimming pool water, drinking water or waste water, is prepared by means of an electrolytic process. Said Dutch laid-open document shows an electrolytic cell built up of two anode compartments and two cathode compartments arranged in alternating relationship. Disposed between a first anode compartment and a first cathode compartment is a membrane made from a material which is suitable for this purpose, which membrane is permeable to cations and impermeable to anions. A similar modular cell unit is formed by the second anode compartment, the second cathode compartment and the cation-permeable membrane disposed therebetween. The modular cell units are arranged adjacently to each other, with the interposition of a liquid-impermeable gasket or insulator. End plates are arranged at the ends of the structure of cell units, through which plates tie rods or other suitable fixing means are passed, which tie rods also extend through the cell units so as to keep the entire structure together in this way. Each cell element is provided with a collecting pipe, also called degasser, in which the gas formed during the electrolytic process separates from the electrolyte.

15  
20  
25  
30

One drawback of the apparatus as discussed above is the fact that the temperature of the series-connected electrolytic cells can rise to undesirable levels. For chemical and mechanical reasons, it is thus desirable in practice to have a possibility of influencing the temperature. In practice, so-called heat exchangers are used for this purpose, which heat exchangers are installed outside the cell block, however, which means that the temperature is influenced externally. Such external influencing cannot prevent the electrolytic cells in particular from exhibiting an impermissible thermal deviation in the centre of the cell package, however. Thus it is desirable to provide an apparatus by means of which thermal influencing can be effected mainly at the position where the thermal deviation is greatest.

The object of the present invention is thus to provide an apparatus for carrying out an electrolytic process on a halogenide compound, which apparatus provides a possibility of internal thermal influencing at the position at which the thermal deviation originates, thus ensuring internal thermal stability.

Another object of the present invention is to provide an apparatus for carrying out an electrolytic process on a halogenide compound, which apparatus collects the corrosive fluids and gases that may have formed due to leakage.

According to the present invention, the invention as referred to in the introduction is characterized in that the assembly of end plates and electrolytic cells is present in a container which contains a liquid, heat-transferring medium, with an electrically non-conducting cell partition being present between the cathode and the anode, which cell partition, in addition to supply pipes and collecting discharge pipes corresponding to the cell element, comprises one or more through channels for the passage therethrough of the heat-transferring medium that is present in the container, which channels have been formed in the cell partition in such a manner that the heat-transferring medium

that is present in the channels is not under an electric voltage, and that no liquid contact takes place between the electrolyte that is present in the electrolytic cells and the heat-transferring medium that is present in the container, outside the electrolytic cells.

5           According to the present invention, the complete cell package, including the two end plates, is thus placed in a heat-transferring medium, for example water, in which the heat-transferring medium in fact performs two functions, viz. the function of a cooling medium, both internally in the through channels that are present in the  
10 cell partition and externally in the container outside the electrolytic cells, and the function of a medium that catches any leakage. Because a significant part of the electric energy that is supplied for the electrolytic process is collected in the heat-transferring medium as a result of the cooling action effected in the present invention, energy  
15 recovery becomes feasible, as a result of which an energy saving is achieved.

In principle, the through channels that are used in the present invention may have any conceivable sectional shape, for example circular, rectangular, trapezoidal and the like. The present invention is  
20 in particular used in environments where gaseous halogenides are wanted, for example for use as a disinfectant for swimming pools or drinking water.

In one preferred embodiment, each combination of cathode and anode is separated by the present cell partition, so that a cooling  
25 function will at all times be performed at the position where heat is being generated. Preferably, a bipolar electrode is used.

In a special embodiment it is desirable for the heat-transferring medium that is present in the container to be passed through a through channels in a forced manner, which can be effected, for  
30 example, by placing one or more pumps.

The heat-transferring medium that is present in the



container can also be utilised for regulating the temperature in the electrolytic cell package and thus the temperature of the electrolytic process, for example by varying the temperature of the medium and/or the rate of circulation, for example by means of forced circulation, using one or more pumps. Because the complete electrolysis unit is submersed in the heat-transferring medium, the risk of gases or electrolytes leaking out is also prevented.

A special embodiment of the present invention is characterized in that a reversing element is disposed adjacently to the electrolytic cell package, which reversing element is provided with underlying supply pipes for supplying electrolyte to the adjacent electrolytic cell package, and furthermore with collecting discharge pipes disposed near the upper side thereof for discharging electrolyte and the gases formed during the electrolytic process in the adjacent electrolytic cell package, for effecting the return of electrolyte from the collecting discharge pipes to the supply pipes, which reversing element is provided with one or more through channels for the passage therethrough of the heat-transferring medium, which channels are so configured that no liquid contact takes place between the electrolyte that is present in the electrolytic cells and the heat transferring medium that is present in the container, outside the electrolytic cells.

In a special embodiment, the electrically non-conducting cell partition is provided with means for electrically interconnecting the various adjacent electrodes without any exchange of electrolyte between the two electrolytic cells via said connection or electrolytic corrosion between the various electrode metals taking place.

In addition to that it is possible to lead the depleted electrolytes to be discharged after the electrolytic process through the heat transferring medium present in the container via a pipe, so that the thermal energy contained in the electrolytes is transferred to the heat-transferring medium.

The present invention will be explained hereinafter with reference to a number of drawings, which drawings must not be construed as constituting a limitation of the invention, however.

Figure 1 is a perspective view of the present apparatus.

5           Figure 2 is a schematic cross sectional view of the apparatus of Figure 1.

Figure 3 is a schematic representation of the present cell partition.

10           Figure 4 is a schematic representation of the cell partition of Figure 3.

According to Figure 1, two electrolytic cells of the filter press type, which are electrically connected in series, are present in a container 1 which contains a heat-transferring medium 2, for example water; for the sake of simplicity, the elements for supplying electrolyte, for example HCl, are not shown in the figure. It should be understood that the present invention is by no means restricted to such a number. The anode 14 is separated from the cathode 15 by a semi-permeable membrane 6. Cathode 15 is separated from anode 16 by means of a cell partition 9, and anode 16 is in turn separated from cathode 17 by the semi-permeable membrane 6. The electrolyte that passes through the electrolytic cells via collecting discharge pipes 13, 19 and supply pipes 7 and 22 for supplying electrolyte is subjected to an electrolytic process at the anode, during which process chlorine gas is formed, for example, which chlorine gas ends up in collecting discharge pipes 19 via the anode compartment and subsequently exits the apparatus via gas discharge pipe 12. Hydrogen gas is formed at the cathode 15, 17 as a result of the electrolytic process, which hydrogen gas rises from the cathode compartment and collects in the collecting discharge pipe 13, in which collecting discharge pipes 13 a separation between electrolyte and hydrogen gas takes place. From the collecting discharge pipes 13, the electrolyte, which is still hot, can subsequently be discharged from the

15  
20  
25  
30

apparatus via the pipe 24, which pipe 24 is led through the medium to so as to effect a transfer of energy. Finally, the hydrogen gas that has formed in the electrolysis apparatus is discharged via the pipe 11. In order to effect a proper flow of electrolyte in the present apparatus, it is preferred to use a reversing element 4 which is provided with underlying supply pipes for supplying electrolyte to the adjacent electrolytic cell package, and which is further provided with collecting discharge pipes disposed near the upper side thereof for discharging electrolyte and the gases formed during the electrolytic process in the adjacent electrolysis package, for effecting the return of electrolyte from the collecting discharge pipes to the supply pipes. In order to be able to control the temperature of the electrolyte that is present in the reversing element, the reversing element is provided with one or more through channels (not shown) for the passage therethrough of the heat transferring medium 2, which channels are so configured that no liquid contact takes place between the electrolyte that is present in the electrolytic cells and the heat-transferring medium that is present in the container, outside the electrolytic cells.

Figure 2 is a schematic side elevation of the electrolysis apparatus of Figure 1. In Figure 2 the flow of electrolyte within the electrolytic cell package is indicated by means of arrows, from which it is apparent that the reversing element 4 arranges for the liquid from the collecting discharge pipes 13, 19 to be returned to the supply pipes 7 and 22 for supplying electrolyte to the electrolytic cells in question.

Figure 3 is a cut-away view of an embodiment of the present cell partition 9, in which the through channels 20 are schematically indicated. The through channels 20 arrange for a temperature regulation to be carried out at the position at which the development of heat mainly takes place, viz. on the surface of the electrodes, in particular by passing heat-transferring medium through the channels 20. The cell partition 9 that is shown in Figure 3 may be formed of two symmetrical



halves, in one of which (or in each of which) through channels 20 have been milled out, after which the two halves have been assembled to form one unit comprising the through channels 20. By thus disposing the channels slightly at an angle, said channels will readily fill with the heat-transferring medium upon submersion of the whole of end plates and the electrolytic cells in the heat-transferring medium.

Figure 4 shows the cell partition 9, with an anode 15 disposed on one side and a cathode 16 disposed on the other side thereof. The anode 15 and the cathode 16 are electrically interconnected via connection 21, 23 consisting of two different metals, which connection 21, 23 is so designed that no exchange of electrolyte between the two electrolytic cells can take place via said connection 21, 23. It will be apparent from Figure 4 that any cooling that may be desired will take place at the position where the development of heat mainly takes place, viz. close to anode 15 and cathode 16, in particular by passing the heat transferring medium 2 through the cell partition 9 via one or more through channels 20.

## CLAIMS

1. An apparatus for carrying out an electrolytic process on a halogenide compound, in which apparatus several electrolytic cells are electrically connected in series, which electrolysis cells each comprise a cell element, provided with underlying supply pipes for supplying electrolyte and with collecting discharge pipes disposed near the upper side thereof for discharging electrolyte and the gases formed during the electrolytic process, a cathode compartment including a cathode and an anode compartment including an anode, and a diaphragm or semi-permeable membrane, in which the electrolytic cells have been pressed together between two end plates with a certain bias, so that each anode compartment and each cathode compartment is constructed as one unit together with the supply pipes and the collecting discharge pipes, characterized in that the assembly of end plates and electrolytic cells is present in a container which contains a liquid, heat-transferring medium, with an electrically non-conducting cell partition being present between the cathode and the anode, which cell partition, in addition to supply pipes and collecting discharge pipes corresponding to the cell element, comprises on or more through channels for the passage therethrough of the heat-transferring medium that is present in the container, which channels have been formed in the cell partition in such a manner that the heat-transferring medium that is present in the channels is not under an electric voltage, and that no liquid contact takes place between the electrolyte that is present in the electrolytic cells and the heat-transferring medium that is present in the container, outside the electrolytic cells.

2. An apparatus according to claim 1, characterized in that a reversing element is disposed adjacently to the electrolytic cell package, which reversing element is provided with underlying supply pipes for supplying electrolyte to the adjacent electrolytic cell package, and

furthermore with collecting discharge pipes disposed near the upper side thereof for discharging electrolyte and the gases formed during the electrolytic process in the adjacent electrolytic cell package, for effecting the return of electrolyte from the collecting discharge pipes to the supply pipes, which reversing element is provided with one or more through channels for the passage therethrough of the heat-transferring medium, which channels are designed in such a manner that no liquid contact takes place between the electrolyte that is present in the electrolytic cells and the heat transferring medium that is present in the container, outside the electrolytic cells.

3. An apparatus according to any one or more of the preceding claims, characterized in that the electrically non-conducting cell partition is provided with means for electrically interconnecting the various adjacent electrodes without any exchange of electrolyte between the two electrolytic cells via said connection or electrolytic corrosion between the various electrode metals taking place.

4. An apparatus according to any one or more of the preceding claims, characterized in that the electrolytes are discharged from the apparatus via a pipe arranged in the heat transferring medium in the container, so as to transfer the thermal energy contained in the electrolytes to the heat-transferring medium.

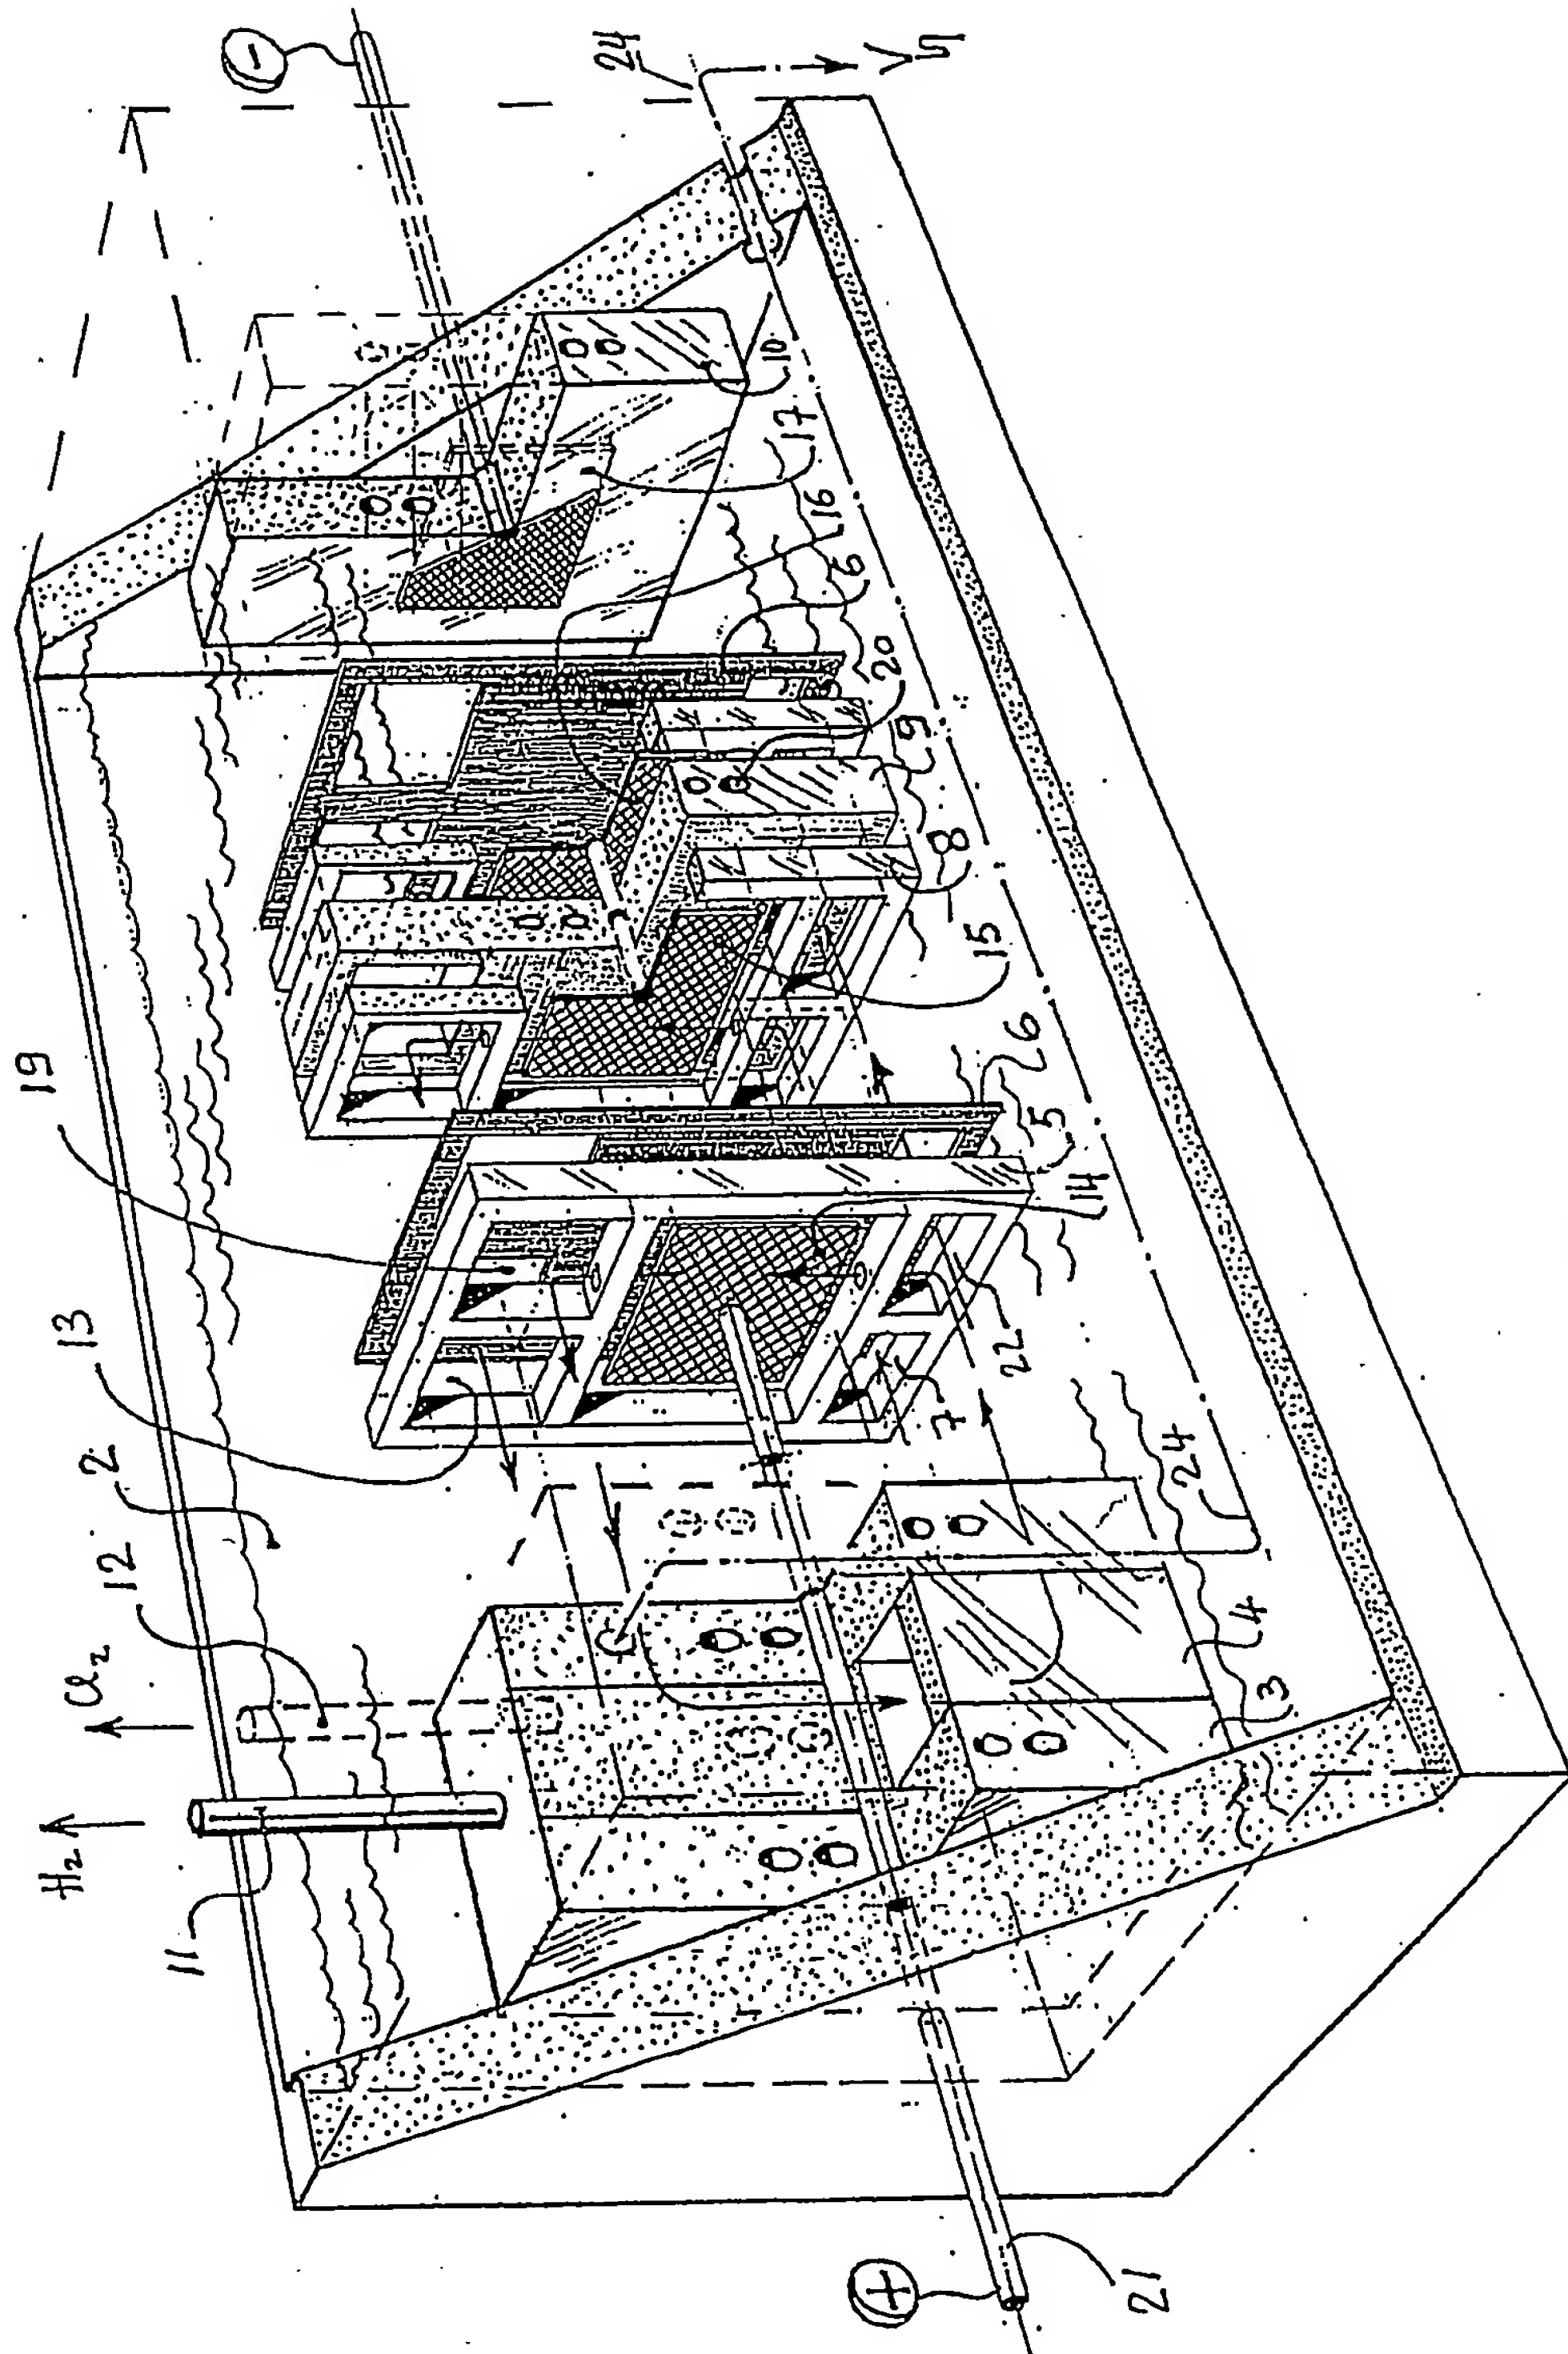


FIG. 1


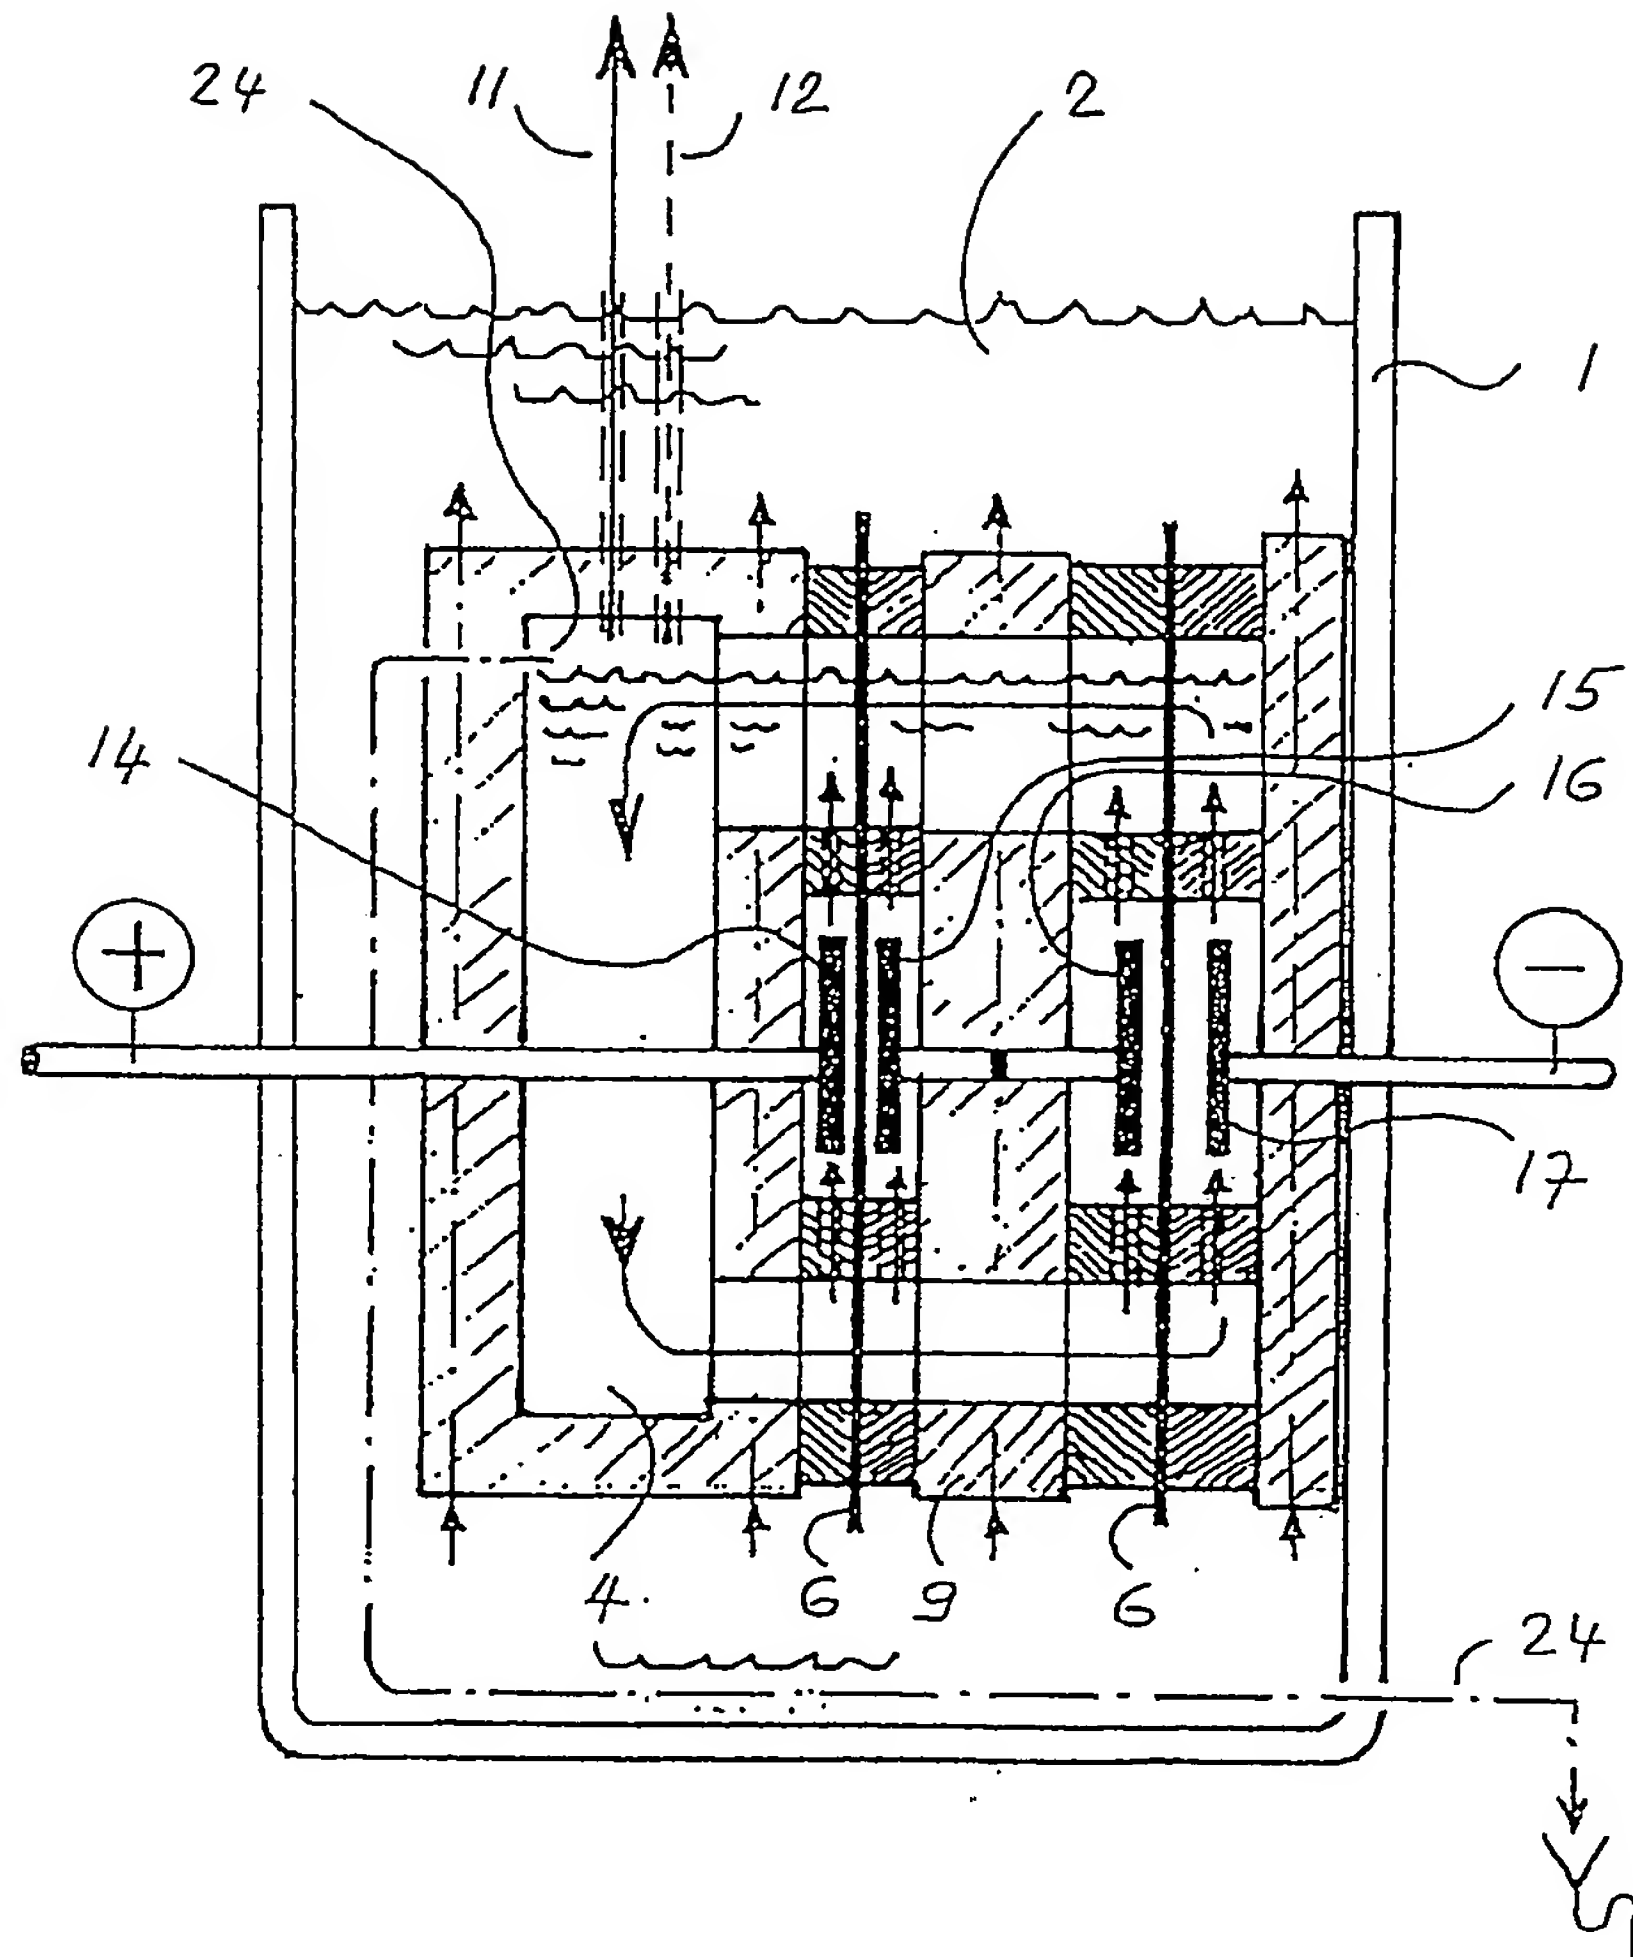


FIG. 2



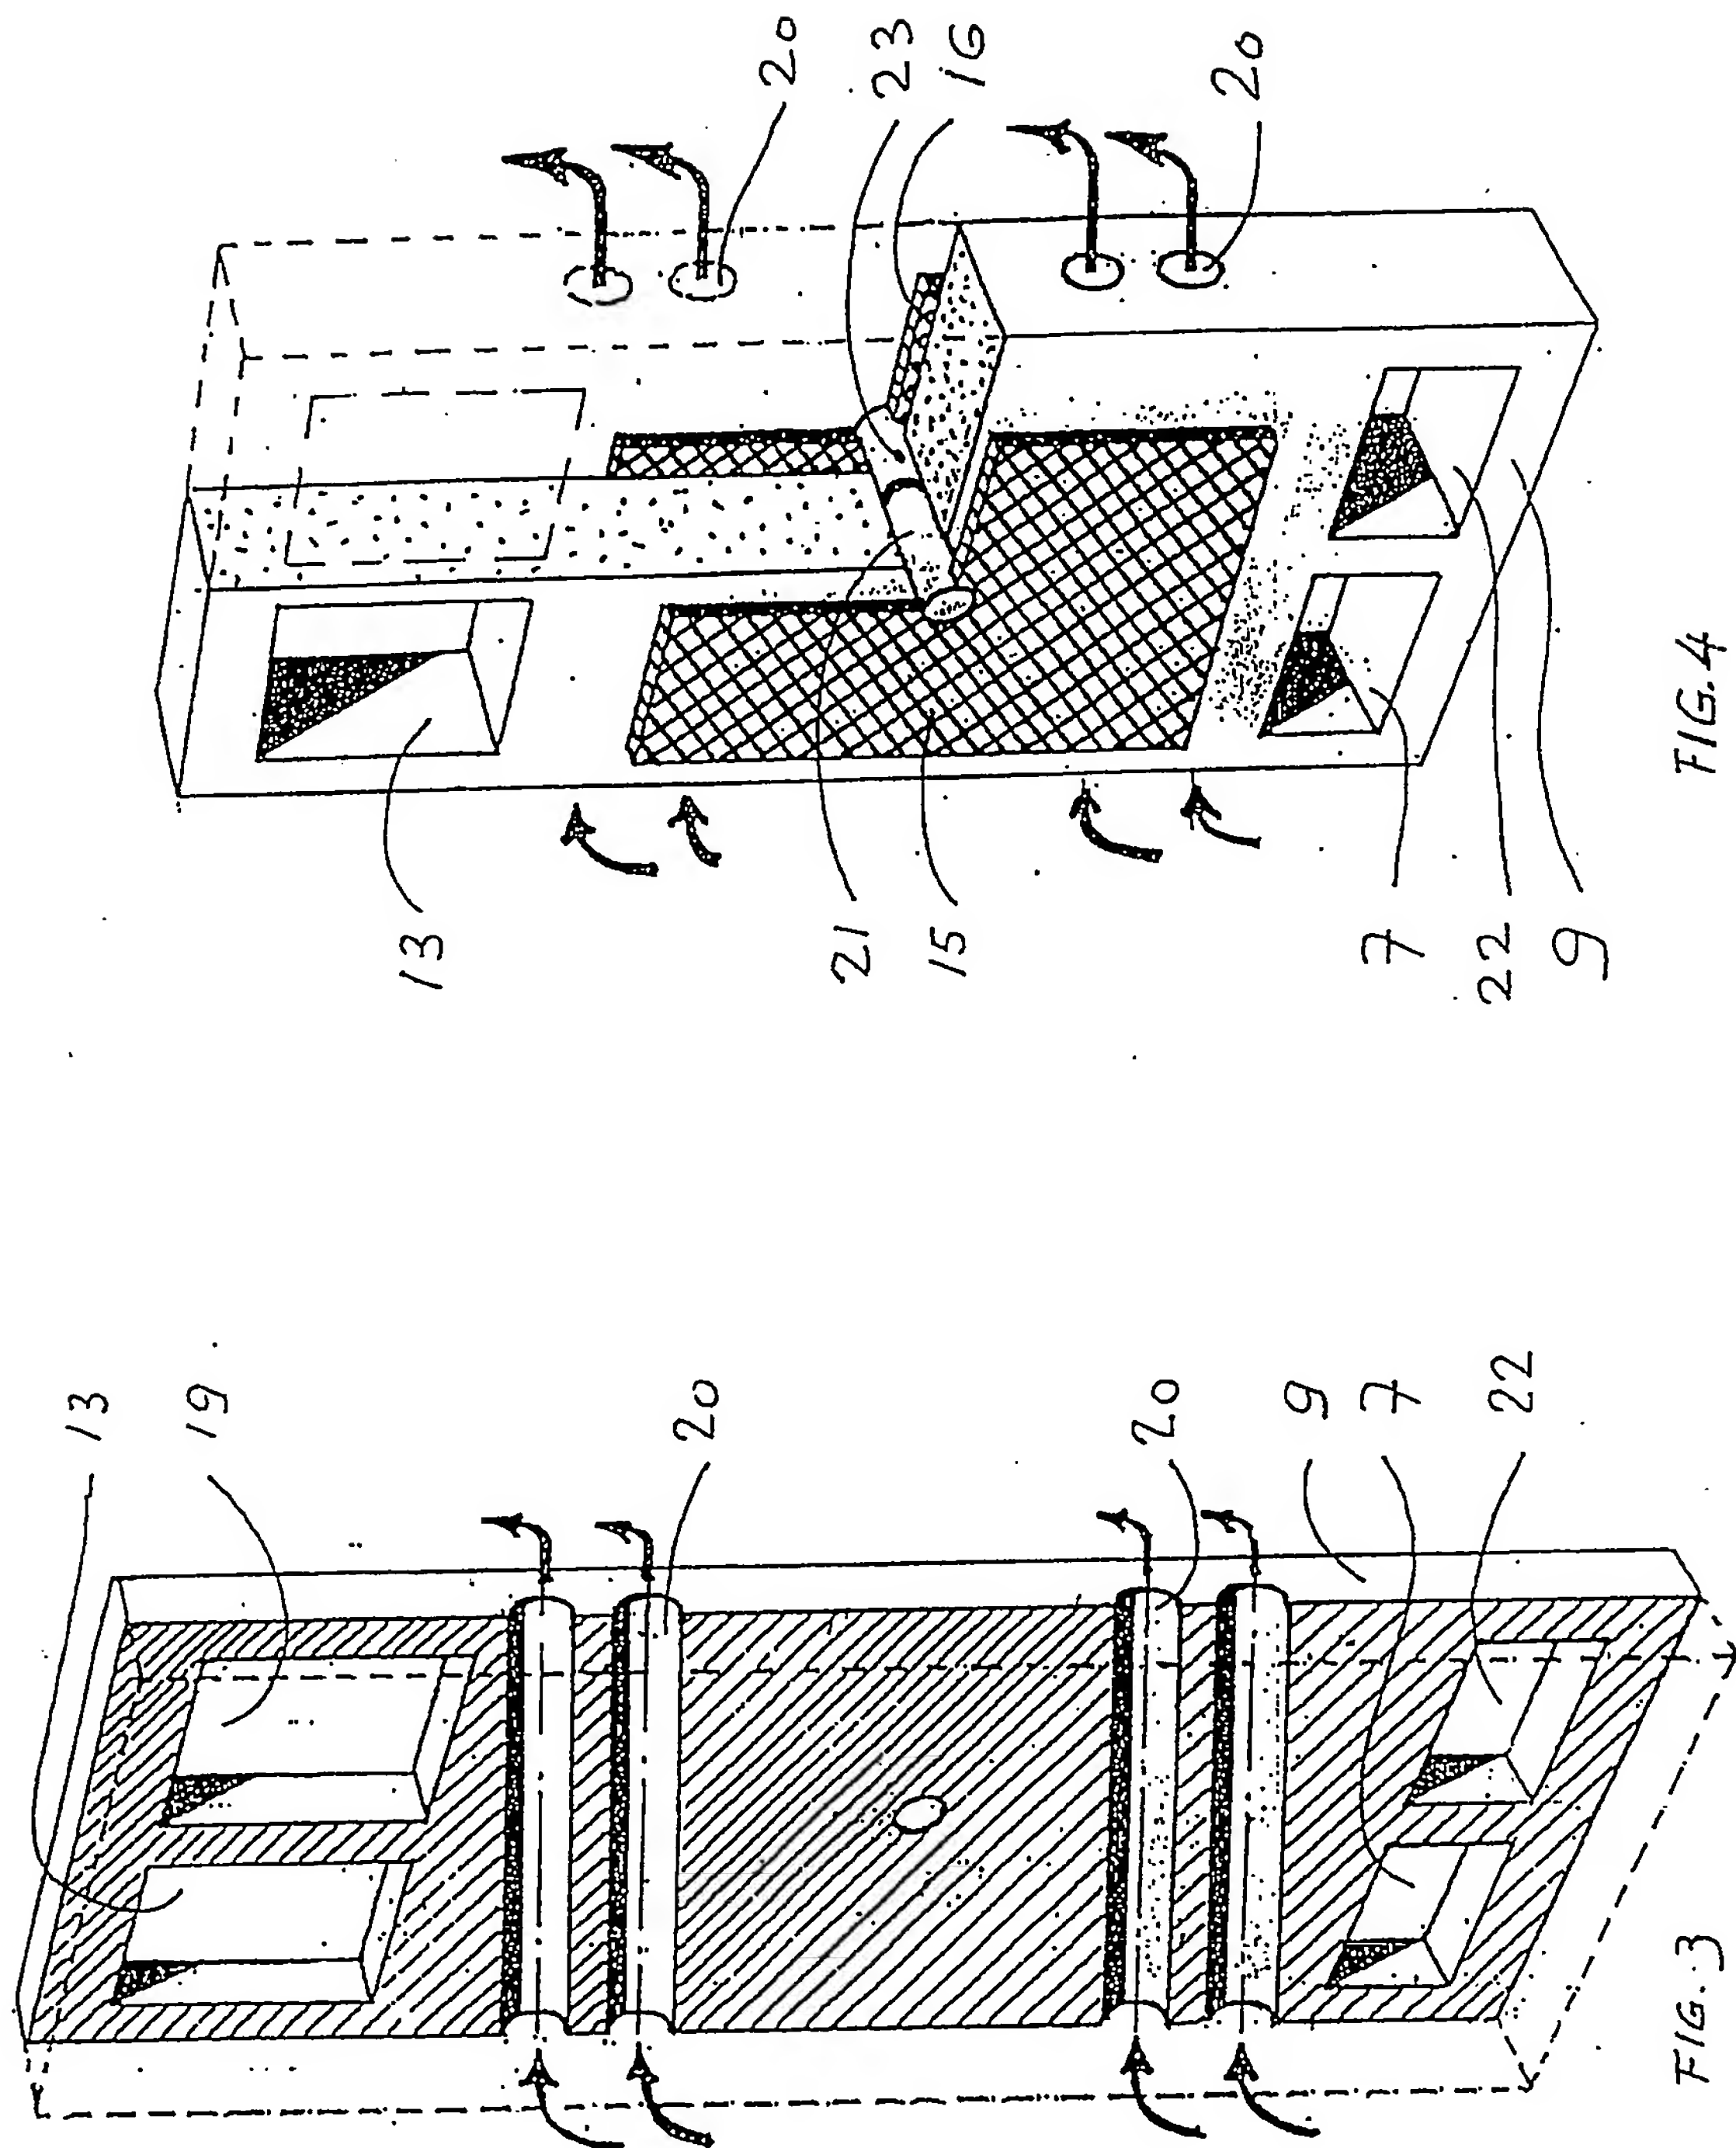

# INTERNATIONAL SEARCH REPORT

Internat	Application No
PCT/NL	03/00234

**A. CLASSIFICATION OF SUBJECT MATTER**  
 IPC 7 C25B15/00 C02F1/461 C25B9/20

According to International Patent Classification (IPC) or to both national classification and IPC

**B. FIELDS SEARCHED**

Minimum documentation searched (classification system followed by classification symbols)  
 IPC 7 C25B C02F

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal

**C. DOCUMENTS CONSIDERED TO BE RELEVANT**

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
E	EP 1 298 231 A (ZILVOLD GERRIT ALBERT) 2 April 2003 (2003-04-02) the whole document	1-4
Y	WO 98/32900 A (ZILVOLD HENDRIK MARTIN ; ZILVOLD TIELEMAN HYDROTECHNIEK (NL)) 30 July 1998 (1998-07-30) the whole document	1
Y	DE 199 10 639 A (FISCHER MARGOT) 14 September 2000 (2000-09-14) cited in the application column 2, lines 43-48	1
Y	US 5 082 543 A (GNANN MICHAEL ET AL) 21 January 1992 (1992-01-21) cited in the application claim 13	1
-/-		

☒ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

\* Special categories of cited documents :

- \*A\* document defining the general state of the art which is not considered to be of particular relevance
- \*E\* earlier document but published on or after the international filing date
- \*L\* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- \*O\* document referring to an oral disclosure, use, exhibition or other means
- \*P\* document published prior to the international filing date but later than the priority date claimed

- \*T\* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- \*X\* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- \*Y\* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- \*Z\* document member of the same patent family

Date of the actual completion of the international search

4 December 2003

Date of mailing of the international search report

12/12/2003

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2  
 NL - 2280 HV Rijswijk  
 Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,  
 Fax (+31-70) 340-3016

Authorized officer

Devisme, F

# INTERNATIONAL SEARCH REPORT

Internat Application No  
PCT/NL 03/00234

## C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	US 5 064 514 A (CAWLFIELD DAVID W ET AL) 12 November 1991 (1991-11-12) cited in the application claim 1	1
A	----- US 3 274 094 A (ALFRED KLEIN) 20 September 1966 (1966-09-20) the whole document	1
A	----- US 3 997 414 A (CASSON HAROLD VINCENT ET AL) 14 December 1976 (1976-12-14) the whole document -----	4

# INTERNATIONAL SEARCH REPORT

Information on patent family members

Internat Application No  
PCT/NL 03/00234

Patent document cited in search report		Publication date		Patent family member(s)	Publication date
EP 1298231	A	02-04-2003	NL	1019070 C2	02-04-2003
			EP	1298231 A1	02-04-2003
WO 9832900	A	30-07-1998	NL	1005081 C2	27-07-1998
			AT	206173 T	15-10-2001
			AU	5682198 A	18-08-1998
			DE	69801807 D1	31-10-2001
			DE	69801807 T2	29-05-2002
			EP	0958407 A1	24-11-1999
			WO	9832900 A1	30-07-1998
DE 19910639	A	14-09-2000	DE	19910639 A1	14-09-2000
US 5082543	A	21-01-1992	DE	3938160 A1	23-05-1991
			DE	59002925 D1	04-11-1993
			EP	0428171 A1	22-05-1991
			ES	2059959 T3	16-11-1994
			JP	3173789 A	29-07-1991
			RU	2025544 C1	30-12-1994
			TR	25047 A	01-09-1992
US 5064514	A	12-11-1991	AT	119586 T	15-03-1995
			AU	654245 B2	27-10-1994
			AU	5500594 A	14-04-1994
			AU	648076 B2	14-04-1994
			AU	7666791 A	30-10-1991
			BR	9106287 A	13-04-1993
			CA	2081370 A1	01-10-1991
			DE	69108018 D1	13-04-1995
			DE	69108018 T2	03-08-1995
			DK	522060 T3	22-05-1995
			EP	0522060 A1	13-01-1993
			ES	2071992 T3	01-07-1995
			GR	3015339 T3	30-06-1995
			JP	6504318 T	19-05-1994
			WO	9115613 A1	17-10-1991
			US	5160416 A	03-11-1992
US 3274094	A	20-09-1966	NONE		
US 3997414	A	14-12-1976	CA	1067453 A1	04-12-1979